


Tiered Storage


SATA	SAS	SSD	SSD
SATA	SAS	SSD	SSD
SATA	SAS	SSD	SSD
SATA	SAS	SSD	SSD



Scale up capacity and performance...

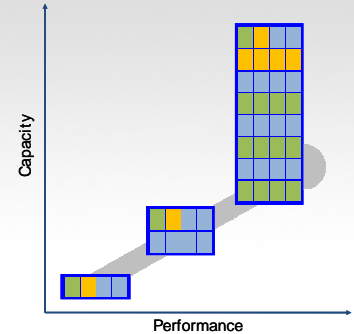

Virtual storage for Virtualized environments

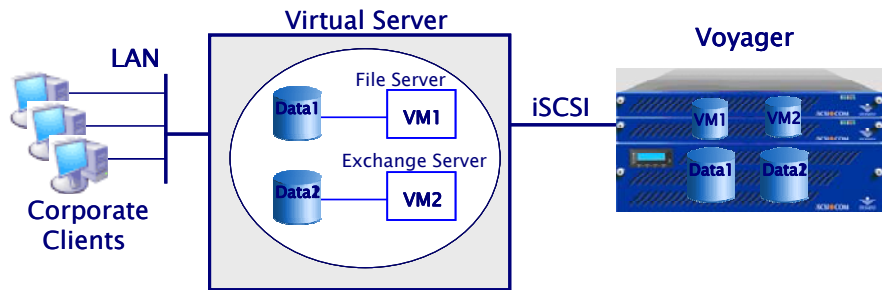- VMWare Certified
- Xen Certified
- Microsoft HyperV
- KVM



	Base Voyager-6GS	Expansion Unit
Physical specification		
Form Factor	5U, 19-inch Rackmountable	3U, 19-inch Rackmountable
Dimensions (HxWxD)	8.6" x 19" x 25.6" (217mm x 485mm x 650mm)	5.2" x 19" x 19.8" (131mm x 482.6mm x 504.3mm)
Package Dimensions (HxWxD)	Two (7.75" x 23" x 32.5") (197mm x 586mm x 828mm) One (16.7" x 22.3" x 30.4") (423mm x 567mm x 772mm)	16.7" x 22.3" x 30.4" 423mm x 567mm x 772mm
Package Weight	Fully populated : 204.7lbs (92.8Kg) ½ populated : 190.7lbs (86.5Kg)	Fully populated : 93lbs (42.18kg) ½ populated: 79lbs (35.8kg)
Power requirements	6 Power supplies/cords 100VAC@25A, 240VAC@12.5A, 50-60Hz	2 Power supplies/cords 100VAC@ 9A, 240VAC@ 4.5A, 47-63Hz
Temperature	Operating: 10° to 35°C (50°F to 95°F), Non-operating: 40° to 60°C (-40°F to 149°F)	
Relative Humidity	8 to 90%, non-condensing	

StoneFly.com
www.StoneFly.com
www.iSCSI.com

Phone 510.265.1616
 Fax: 510.265.1565
 Email: Sales@StoneFly.com

Headquarters
 21353 Cabot Blvd
 Hayward, CA 94545

San Diego Office
 6191 Cornerstone Court, #105
 San Diego, CA 92121